


COAXIAL SWITCHING

RL716-01



Name	Coaxial Switching
Model	RL716-01
Controlling method	Manual and automatic
Average power	DC-1000MHz ($\leq 1\text{kW}$) DC-2MHz ($\leq 2\text{kW}$)
Connectors	4 × 7/16
Frequency range	DC-1000MHz
VSWR	≤ 1.06
Insertion loss	$\leq 0.08\text{dB}$
Isolation	$\geq 65\text{dB}$
Switching time	$< 0.2\text{s}$
Body case material	Aluminum alloy antioxidation coating
Weight	2kg
Amounting support	Together
Operating voltage/Frequency/Current	220V/50Hz/0.5A
Panel position indication	Indication light and mechanical indication

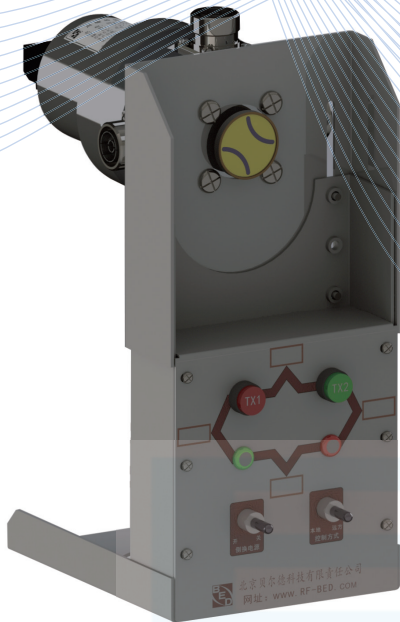

Tel: +8610 80119366
Fax: +8610 69705030
E-mail: BED@RF-BED.com